




Quectel L26-DR Series

Compact Multi-Constellation IATF 16949 Compliant GNSS Module with DR Function

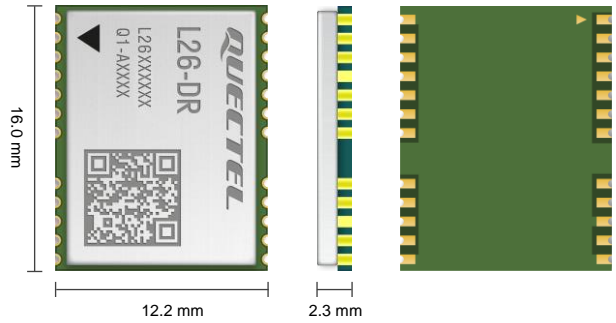

The L26-DR is a series of concurrent multi-GNSS modules supporting dead reckoning function. The modules are equipped with a powerful GNSS core and a 6-axis IMU composed of a 3-axis accelerometer and a 3-axis gyroscope. The L26-DR series provides an outstanding performance and is easy to integrate. The modules are designed and manufactured according to IATF 16949: 2016 standard.

The L26-DR series supports GPS, GLONASS, Galileo, BDS and QZSS constellations. This multi-constellation feature guarantees accurate navigation in harsh environments such as dense urban canyons. The dead-reckoning feature enables reliable positioning performance, even when GNSS signals are absent or compromised. The integrated LNA improves the module's performance under signal-challenging conditions.

Compared with single GPS system, the enabling of multiple GNSS systems generally increases the number of visible satellites, reduces the time to first fix and improves positioning accuracy while driving through dense urban canyon environment.

The superior performance of the L26-DR series makes it ideal for automotive and industrial applications, such as vehicle tracker, T-BOX and vehicle navigation system. Besides, its ultra low power consumption makes it suitable for power-sensitive devices.



Key Features

- ✓ Ultra-compact size: 12.2 mm × 16.0 mm × 2.3 mm
- ✓ Multi-GNSS engine for GPS, GLONASS, Galileo, BDS and QZSS
- ✓ Built-in LNA for better sensitivity
- ✓ Embedded 6-axis IMU (3-axis accelerometer + 3-axis gyroscope)
- ✓ DGPS and SBAS (WAAS/EGNOS/MSAS/GAGAN)
- ✓ Wheel Tick/UART/CAN interfaces to get car speed info
- ✓ Integrated dead-reckoning algorithm
- ✓ Free mounting function support in ADR
- ✓ Built-in active antenna detection function



Multi-GNSS System



Ultra Low Power Consumption



Extremely Compact Size



Tracking Sensitivity:
-162 dBm



Extended Temperature Range:
-40 to +85 °C



RoHS Compliant

Quectel L26-DR Series

GNSS Module	L26-DR (AA)	L26-DR (ADR)	L26-DR (UDR)	L26-DR (ADRC)
Region	Global	Global	Global	Global
Dimensions (mm)	12.2 mm × 16.0 mm × 2.3 mm	12.2 mm × 16.0 mm × 2.3 mm	12.2 mm × 16.0 mm × 2.3 mm	12.2 mm × 16.0 mm × 2.3 mm
Weight (g)	Approx. 0.9	Approx. 0.9	Approx. 0.9	Approx. 0.9
Grade	Automotive AEC-Q104 qualified	Automotive AEC-Q104 qualified	Industrial	Automotive (chipset compliant with AEC-Q100)
Temperature Range				
Operating Temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Storage Temperature	-40 °C to +90 °C	-40 °C to +90 °C	-40 °C to +90 °C	-40 °C to +90 °C
GNSS Features				
Supported Bands	GPS L1 C/A: 1575.42 MHz GLONASS L1: 1602.5625 MHz Galileo E1: 1575.42 MHz BDS B1I: 1561.098 MHz QZSS L1 C/A: 1575.42 MHz	GPS L1 C/A: 1575.42 MHz GLONASS L1: 1602.5625 MHz Galileo E1: 1575.42 MHz BDS B1I: 1561.098 MHz QZSS L1 C/A: 1575.42 MHz	GPS L1 C/A: 1575.42 MHz GLONASS L1: 1602.5625 MHz Galileo E1: 1575.42 MHz BDS B1I: 1561.098 MHz QZSS L1 C/A: 1575.42 MHz	GPS L1 C/A: 1575.42 MHz GLONASS L1: 1602.5625 MHz Galileo E1: 1575.42 MHz BDS B1I: 1561.098 MHz QZSS L1 C/A: 1575.42 MHz
Default GNSS Constellations	GPS + GLONASS + Galileo + QZSS	GPS + GLONASS + Galileo	GPS + GLONASS + Galileo	GPS + GLONASS + Galileo + QZSS
Number of Concurrent Constellations	3 + QZSS	3 + QZSS	3 + QZSS	3 + QZSS
Channel	Tracking: 48 Fast Acquisition: 2	Tracking: 48 Fast Acquisition: 2	Tracking: 48 Fast Acquisition: 2	Tracking: 48 Fast Acquisition: 2
SBAS	WAAS, EGNOS, MSAS, GAGAN	WAAS, EGNOS, MSAS, GAGAN	WAAS, EGNOS, MSAS, GAGAN	WAAS, EGNOS, MSAS, GAGAN
Horizontal Position Accuracy ^①	Autonomous: 1.5 m	Autonomous: 1.5 m	Autonomous: 1.5 m	Autonomous: 1.5 m
Velocity Accuracy ^②	Without Aid: 0.1 m/s	Without Aid: 0.1 m/s	Without Aid: 0.1 m/s	Without Aid: 0.1 m/s
Acceleration Accuracy ^②	Without Aid: 0.1 m/s ²	Without Aid: 0.1 m/s ²	Without Aid: 0.1 m/s ²	Without Aid: 0.1 m/s ²
Accuracy of 1PPS Signal (RMS) ^②	50 ns	32 ns	44 ns	45 ns
TTFF (with AGNSS) ^③	Cold Start: 13 s	Cold Start: 13 s	Cold Start: 13 s	Cold Start: 13 s
TTFF (Without AGNSS) ^②	Cold Start: 32 s Warm Start: 27 s Hot Start: 2 s	Cold Start: 32 s Warm Start: 25 s Hot Start: 2 s	Cold Start: 32 s Warm Start: 25 s Hot Start: 2 s	Cold Start: 32 s Warm Start: 25 s Hot Start: 2 s
Sensitivity (@ GPS + GLONASS)	Acquisition: -145 dBm Tracking: -162 dBm Reacquisition: -152 dBm	Acquisition: -145 dBm Tracking: -162 dBm Reacquisition: -152 dBm	Acquisition: -145 dBm Tracking: -162 dBm Reacquisition: -152 dBm	Acquisition: -145 dBm Tracking: -162 dBm Reacquisition: -152 dBm
Dynamic Performance ^②	Max. Altitude: 18000 m Max. Velocity: 515 m/s Max. Acceleration: 4g*	Max. Altitude: 18000 m Max. Velocity: 515 m/s Max. Acceleration: 4g	Max. Altitude: 18000 m Max. Velocity: 515 m/s Max. Acceleration: 4g	Max. Altitude: 18000 m Max. Velocity: 515 m/s Max. Acceleration: 4g
Certifications				
Regulatory	Europe: CE	Europe: CE	Europe: CE	Europe: CE
Others	RoHS	RoHS	RoHS	RoHS
Interface				
UART Interface	Adjustable: 115200–921600 bps Default: 115200 bps Update Rate: 1 Hz (Default); Max. 10 Hz	Adjustable: 115200–921600 bps Default: 115200 bps Update Rate: 1 Hz	Adjustable: 115200–921600 bps Default: 115200 bps Update Rate: 1 Hz (Default); Max. 10 Hz	Adjustable: 115200–921600 bps Default: 115200 bps Update Rate: 1 Hz (Default); Max. 10 Hz
Protocol				
Protocol	NMEA 0183	NMEA 0183	NMEA 0183	NMEA 0183
External Antenna Interface				
Antenna Type	Passive or Active ^④	Passive or Active ^④	Passive or Active ^④	Passive or Active ^④
Antenna Power Supply	External or Internal (through VDD_RF)	External or Internal (through VDD_RF)	External or Internal (through VDD_RF)	External or Internal (through VDD_RF)
Electrical Characteristics				
Supply Voltage Range	3.0–3.6 V, typ. 3.3 V	3.0–3.6 V, typ. 3.3 V	3.0–3.6 V, typ. 3.3 V	3.0–3.6 V, typ. 3.3 V
I/O Voltage	Following VCC	Following VCC	Following VCC	Following VCC
Power Consumption (@ Default Constellations, 3.3 V) ^②	Normal Operation: 81 mA (267.3 mW) @ Acquisition 81 mA (267.3 mW) @ Tracking Power Saving Modes: 1.7 mA (5.61 mW) @ Standby Mode 8 μA (26.4 μW) @ Backup Mode	Normal Operation: 81 mA (267.3 mW) @ Acquisition 80 mA (264 mW) @ Tracking Power Saving Modes: 1.7 mA (5.61 mW) @ Standby Mode 8 μA (26.4 μW) @ Backup Mode	Normal Operation: 84 mA (277.2 mW) @ Acquisition 81 mA (267.3 mW) @ Tracking Power Saving Modes: 1.7 mA (5.61 mW) @ Standby Mode 8 μA (26.4 μW) @ Backup Mode	Normal Operation: 81 mA (267.3 mW) @ Acquisition 80 mA (264 mW) @ Tracking Power Saving Modes: 1.7 mA (5.61 mW) @ Standby Mode 8 μA (26.4 μW) @ Backup Mode

- NOTE:
- ①: CEP, 50 %, 24 hours static, -130 dBm, more than 6 SVs.
 - ②: Room temperature, all satellites at -130 dBm.
 - ③: Open-sky, active high-precision GNSS antenna.
 - ④: To further mitigate the impact of out-of-band signals on GNSS module performance, you must choose the active antenna whose SAW filter is placed in front of the LNA in the internal framework. DO NOT place the LNA in the front.
 - *: Preliminary data.